



A SECTION SIMILAR TO THIS WOULD BE NEEDED TO GET THE PERVIOUS CREDIT FROM THE CITY OF BROOKHAVEN

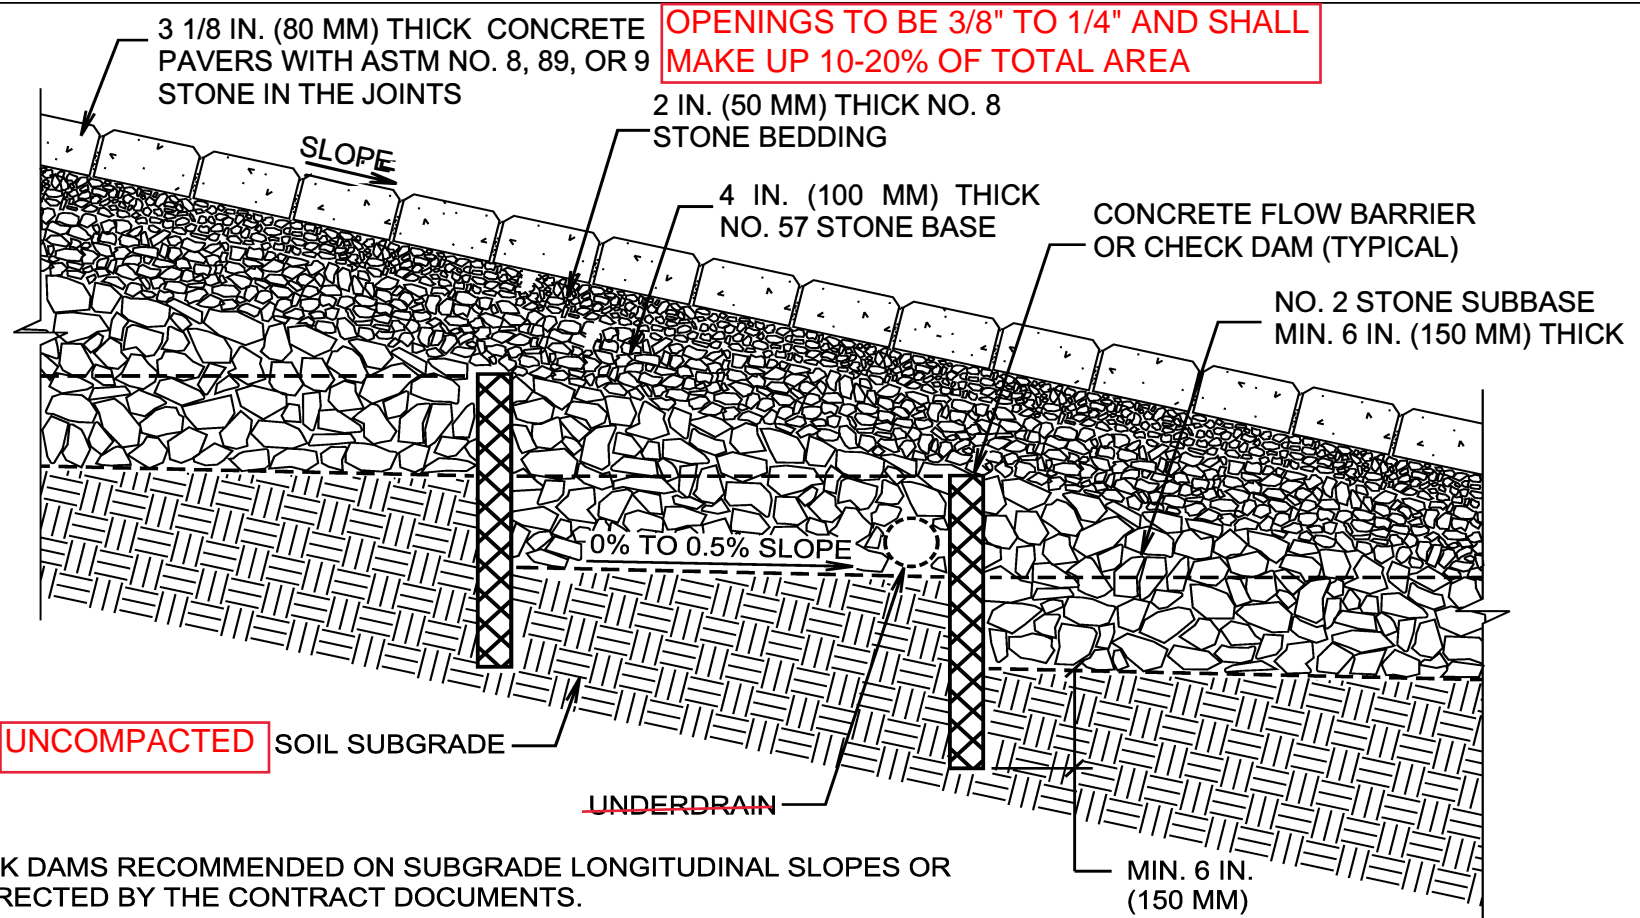

NOTES:

1. CHECK DAMS RECOMMENDED ON SUBGRADE LONGITUDINAL SLOPES OR AS DIRECTED BY THE CONTRACT DOCUMENTS.

- 2. 6" of No. 2 Stone subbase is required to receive the 50% credit, 18" is required to receive 100% credit from the Brookhaven lot coverage requirements.
- 3. Nonwoven geotextile will be used on the top, sides & bottom of the subbase
- 4. No sand, gravel or fines allowed to get the pervious credit from the city of Brookhaven
- 4. If used, 12" of No. 2 Stone subbase is required below the underdrain to receive the 50% credit, 24" required to receive 100% credit from the Brookhaven lot coverage requirements.



PERMEABLE PAVEMENT ON A TERRACED  
SUBGRADE WITH FULL EXILTRATION TO THE SOIL

DRAWING DATE: 9/19/22

SCALE NO SCALE