



NOTES:

1. BACKFILL AROUND CURB TO 8" BELOW TOP. ONCE CURED, INSTALL AND TAMP APPROVED COLD PATCH (**EZ STREET** OR **PERMA PATCH**) TO MEET 6" CURB REVEAL.
2. PER GDOT SPECIFICATIONS: SECTION 600 CONTROLLED LOW STRENGTH FLOWABLE FILL, 125 PSI MIN.

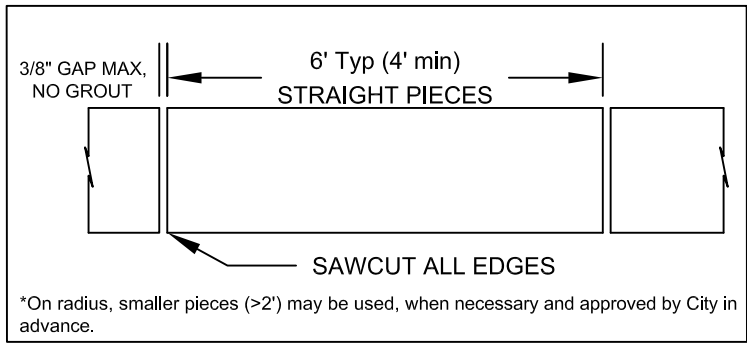


**6" GRANITE CURB
PLAN VIEW**

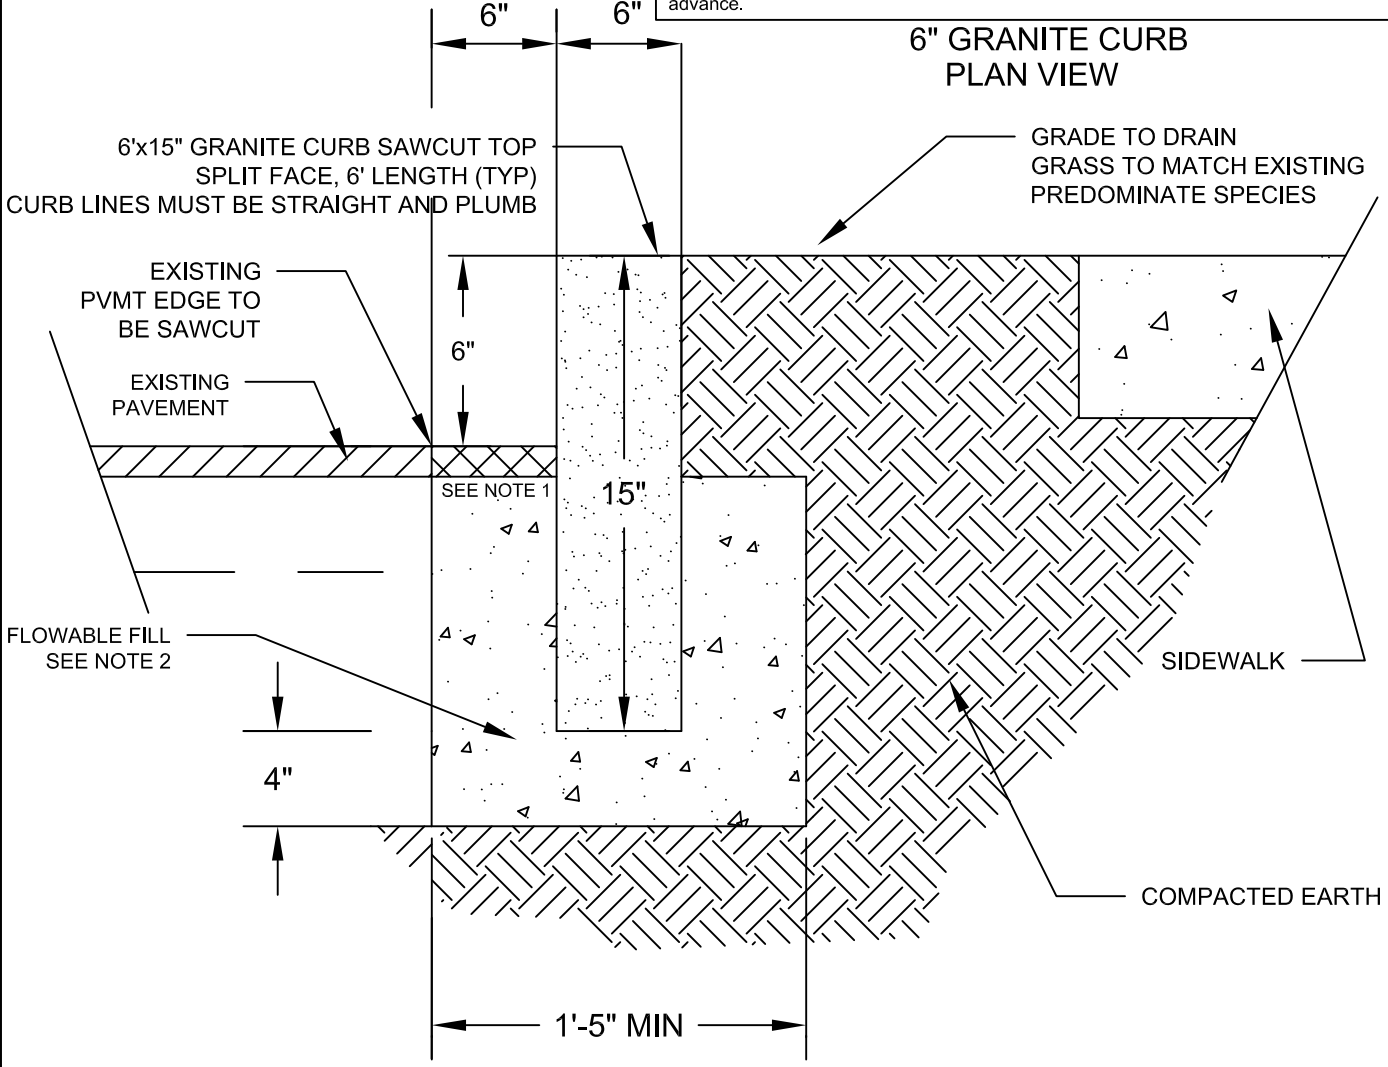

**6" GRANITE CURB
DETAIL**

SCALE: NTS



**CITY OF BROOKHAVEN
PUBLIC WORKS DEPARTMENT
GRANITE CURB DETAIL**

EFFECTIVE MARCH 1, 2023 FEB 2023