


- * L E G E N D ***
 NOTE: ALL ITEMS IN THIS LEGEND MAY NOT APPEAR ON THIS PLAT.
 AKA ALSO KNOWN AS N/F NOW OR FORMERLY
 APD AS PER DEED NAIL NAIL FOUND
 APP AS PER PLAT P PLAT (BOOK/PAGE)
 BSL BUILDING (SETBACK) LINE POB POINT OF BEGINNING
 CP COMPUTED POINT POC POINT OF COMMENCEMENT
 CTP CRIMP TOP PIPE FOUND R RADIUS LENGTH
 D DEED (BOOK/PAGE) R/W RIGHT-OF-WAY
 DW DRIVEWAY RBF REINFORCING BAR FOUND
 EP EDGE OF PAVEMENT (1/2" UNO)
 FFE FINISH FLOOR ELEVATION RBS 1/2" REINFORCING BAR SET
 FKA FORMERLY KNOWN AS SW SIDEWALK
 IPF IRON PIN FOUND SSE SANITARY SEWER EASEMENT
 L ARC LENGTH SSCO SANITARY SEWER CLEANOUT
 LL LAND LOT -X- FENCE LINE
 LLL LAND LOT LINE CB CATCH BASIN
 N NEIGHBOR'S SWCB STORM WATER CATCH BASIN
 ■ WALL

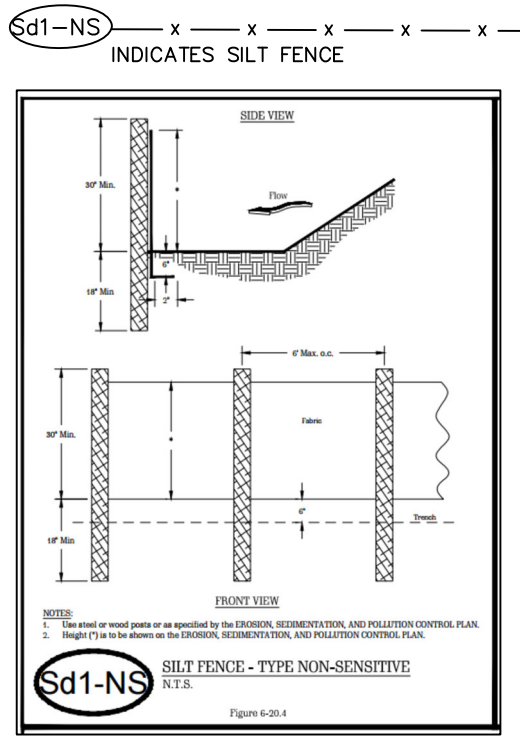

DISTURBED AREA
 A.K.A.
 LIMITS OF CONSTRUCTION
 8374 SF= 0.063 AC

ALL MATTERS OF TITLE ARE EXCEPTED. THIS PLAT IS SUBJECT TO ALL LEGAL EASEMENTS AND RIGHTS-OF-WAY PUBLIC OR PRIVATE. NOTE: PROPERTY LINES SHOWN ON THIS MAP/PLAT REPRESENT PHYSICAL FIELD CONDITIONS BY EVIDENCE OF APPARENT POSSESSION (IRON PINS FOUND, OLD & ESTABLISHED FENCE LINES, OLD WALL LINES, SHRUB & HEDGE LINE, HOUSE LOCATIONS, ETC.) THEY MAY DIFFER AND BE IN CONTENTION FROM EVIDENCE FOUND AT THE APPLICABLE COUNTY COURTHOUSE. THEY MAY ALSO DIFFER FROM OTHER SURVEYOR OPINIONS AND/OR NEIGHBORS SURVEYS/PLATS. A FULL LAND TITLE REPORT OPINION ON ALL PROPERTIES, INCLUDING ADJACENT AND CONTIGUOUS PROPERTIES MAY BE NEEDED TO RESOLVE ALL POSSIBLE PROPERTY LINE DISPUTES OR DISCREPANCIES.




THIS MAP/PLAT WAS MADE WITHOUT THE BENEFIT OF A CURRENT TITLE COMMITMENT. EASEMENTS AND ENCUMBRANCES MAY EXIST WHICH BENEFIT AND BURDEN THIS PROPERTY. THIS MAP/PLAT IS SUBJECT TO REVISIONS AND UPDATE UPON RECEIPT OF SAID TITLE COMMITMENT.

BUILDING LINES SHOWN HEREON DERIVED FROM VARIOUS ONLINE SOURCES. THEY MAY BE IN CONTENTION WITH OR DIFFER FROM INTERPRETATIONS OF GOVERNING AUTHORITIES. IT IS THE CLIENT'S OBLIGATION TO CONFIRM WITH PERMITTING AGENCIES BASED ON THEIR SPECIFIC CONSTRUCTION PROJECTS.

~ THIS MAP/PLAT HAS BEEN FIELD RUN WITH ASSUMED ELEVATIONS, THEN ADJUSTED TO NAVD 88 BASED ON MULTIPLE OBSERVATIONS FROM GOOGLE EARTH SATELLITE IMAGERY OR OTHER ONLINE SOURCES. THE ELEVATIONS SHOWN HEREON ARE +/- 1' (± ONE FOOT).

TREE SYMBOLS ARE NOT TO SCALE. TREE SYMBOLS REPRESENT POSITION OF TREE & ARE NOT THE CRITICAL ROOT ZONE (NOT DRIPLINE).

NOTE: ANY & ALL UNDERGROUND UTILITIES, I.E. SEWER, STORM, GAS, WATER, ETC., HAVE NOT BEEN FIELD LOCATED BY CONVENTIONAL SURVEY METHODS.

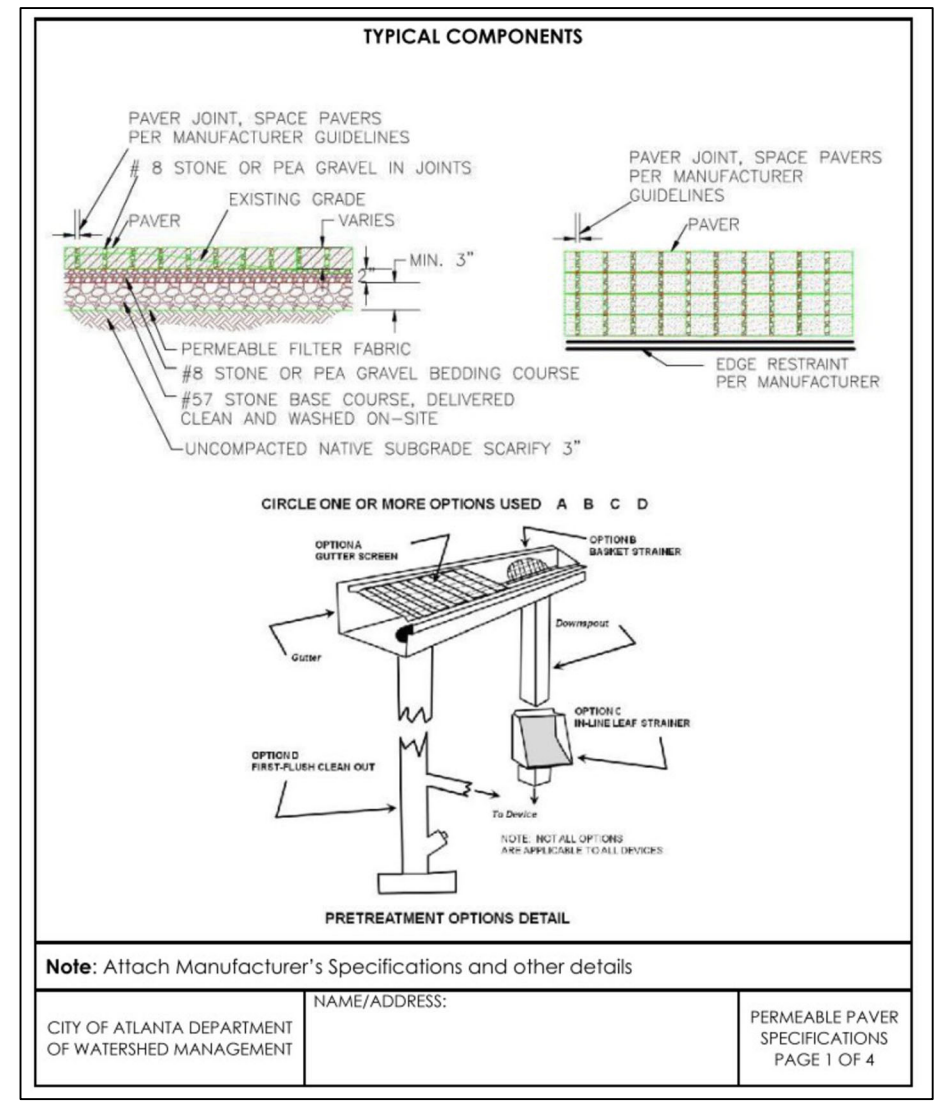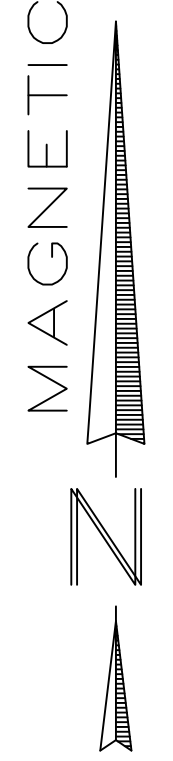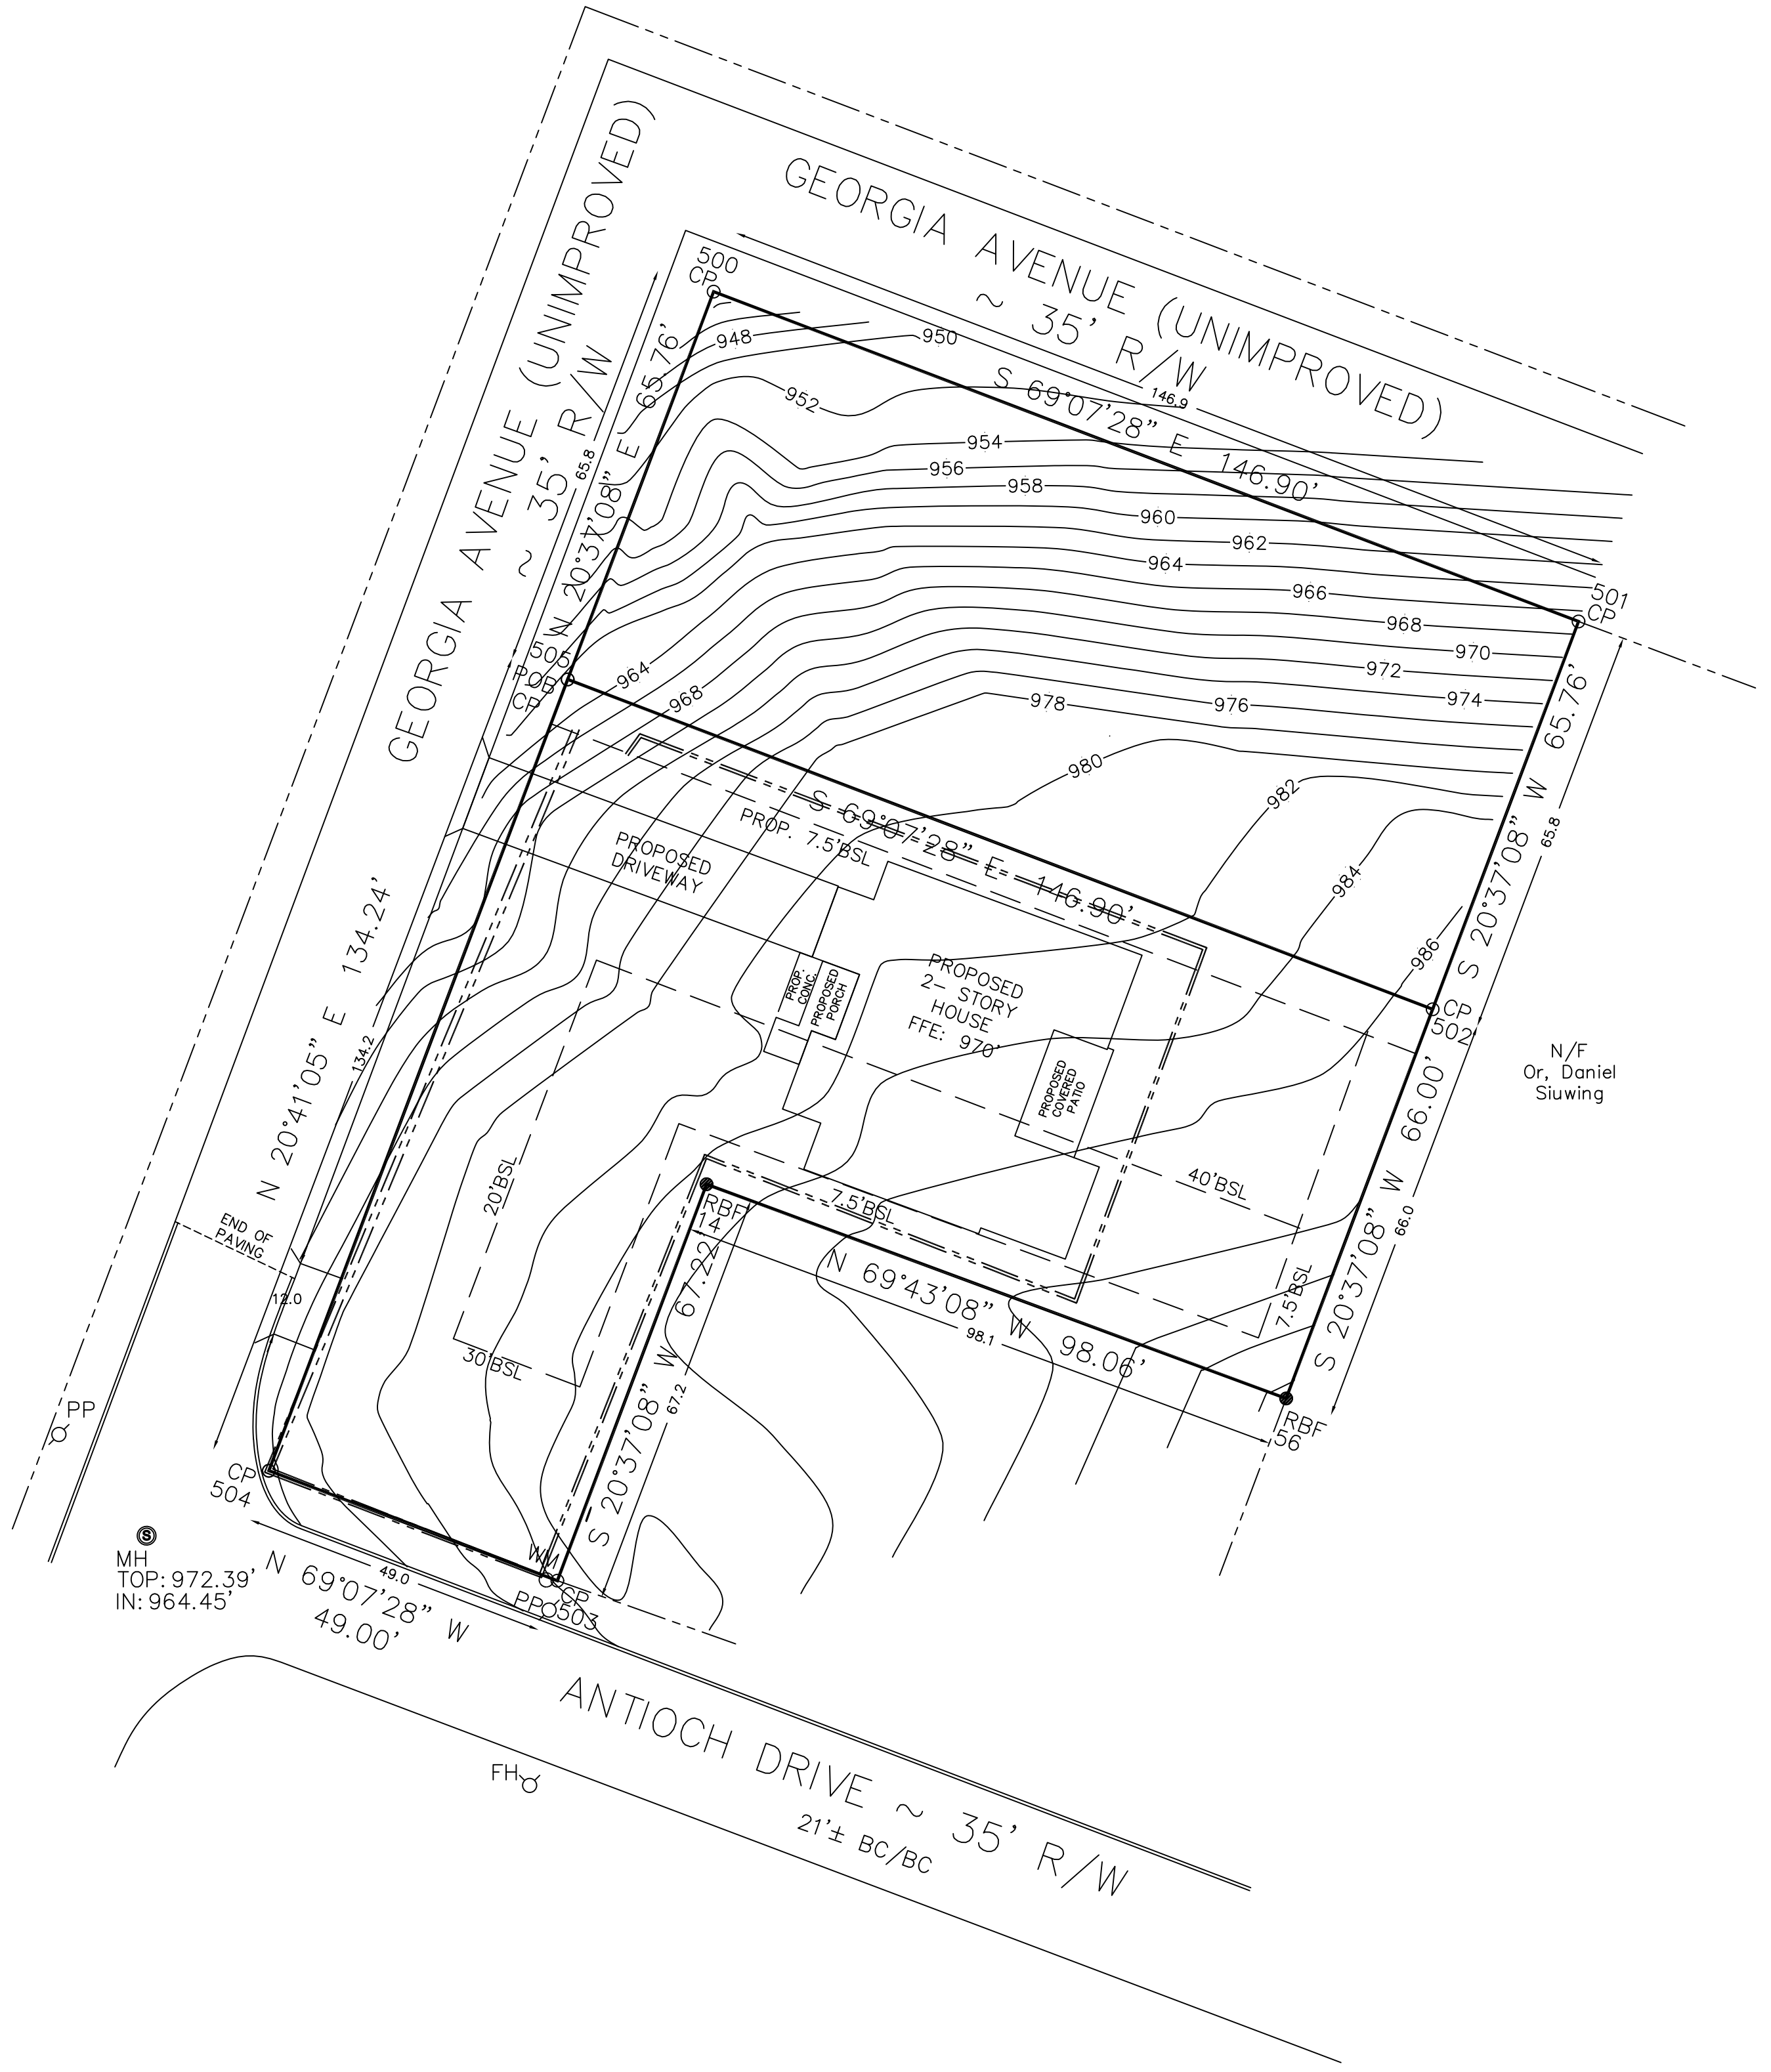

IMPERVIOUS (IN SQUARE FEET) 1034	
PROP. HOUSE	2124
PROP. CONC. DW	709
PROP. CONC.	42
PROP. PORCH	103
PROP. COV. PATIO	179
TOTAL IMPERVIOUS	3157

TOTAL IMPERVIOUS 3157 SQFT = 24.12%

REVISED: 02-24-2024 AE

PROPERTY ADDRESS: 1034 ANTIOCH DR ATLANTA, GA 30319	PLAT PREPARED FOR: 1034 ANTIOCH DRIVE
LAND AREA: 1034-13,088 SF 0.300 AC	PARCEL ID: 18 275 14 061
ZONING: RS-75	LAND LOT 275 18th DISTRICT BY:
	DeKALB COUNTY, GEORGIA FIELD DATE: 7-26-2019 TH
	LOCATED IN BROOKHAVEN DRAWN DATE: 8-01-2019 SS
	REFERENCE: PLAT BOOK PAGE ALL MATTERS OF TITLE ARE EXCEPTED, NOT TO BE RECORDED NOR USED TO CONVEY PROPERTY.
	REFERENCE: DEED BOOK 18613, PAGE 508
	THE FIELD DATA UPON WHICH THIS PLAT IS BASED HAS A CLOSURE OF 1 FOOT IN 10,000+ FEET, AN ANGULAR ERROR OF +/- 1 SECOND PER ANGLE POINT AND WAS ADJUSTED USING THE LEAST SQUARES METHOD. THIS PLAT HAS BEEN CALCULATED FOR CLOSURE AND FOUND TO BE ACCURATE TO 1 FOOT IN 30,000+ FEET. AN ELECTRONIC TOTAL STATION WAS USED IN THE PREPARATION OF THIS PLAT. NO STATE PLANE MONUMENT FOUND WITHIN 500' OF THIS PROPERTY.
	THIS SURVEY WAS PREPARED IN CONFORMITY WITH THE TECHNICAL STANDARDS FOR PROPERTY SURVEYS IN GEORGIA AS SET FORTH IN CHAPTER 180-7 OF THE RULES OF THE GEORGIA BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS AND AS SET FORTH IN THE GEORGIA PLAT ACT O.C.G.A. 15-6-67.

MH
 OUT: 995.05'
 TOP: 1010.94'