


**Addendum No. 1**

**RFP No. 24-007**

ITB 24-007 Chantilly Drive Sidewalk Project

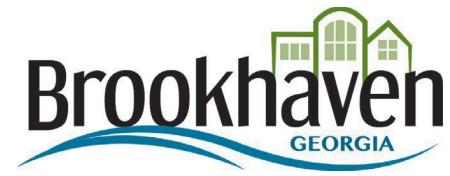

**Date:** May 23, 2024

**To:** All Offerors'

**From:** City of Brookhaven Purchasing Department


**RE:** ITB 24-007 Chantilly Drive Sidewalk Project

Please see Addendum No. 1 for the above-referenced solicitation.

**Addendum No. 1**

**RFP No. 24-007**

ITB 24-007 Chantilly Drive Sidewalk Project

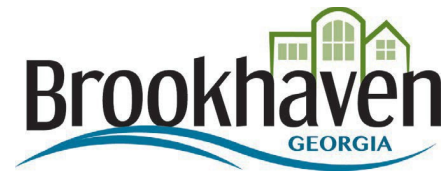

1. The following change has been made to the above-referenced solicitation.


- Add: Change Bid due to June 07, 2024, at 3:30 pm.**
- Add: Wall Envelope.**
- Add: Additional answers to questions.**

Separate line item for the geotechnical testing. Add a lump sum item as below:

⊕ UTILITIES					
	1	EA	ADJUST WATER METER TO GRADE – STA 11+05		
	1	EA	ADJUST WATER VALVE TO GRADE – STA 11+38		
	1	EA	ADJUST WATER METER VAULT TO GRADE – STA 16+72		
	1	EA	ADJUST PULL BOX TO GRADE – STA 16+40		
GEOTECHNICAL TESTING (FILL, CONCRETE, GAB)					
	1	LS	GEOTECHNICAL TESTING (FILL, CONCRETE, GAB)		

1. As per general note# 7 on Drawing no.04-0001; It states that "the Construction activities shall be monitored by Geotechnical Consulting Firm" and Its cost shall be at the Contractor's cost. Would you please elaborate on what is the City's expectation/meaning of "Construction activities shall be monitored by Geotechnical Consulting Firm"? Is the City requiring contractors to perform Testing for Dirt, Concrete, and GAB and submit the results accordingly to the city?  
**Yes. The contractor is to provide geotechnical testing of fill, concrete, and GAB and provide results to the city accordingly. Include cost in the grading complete line item. (Or do we want to include a separate line item for the geotechnical testing?)**
2. There are two driveway constructions on this project. Can the City allow the Contractor to close the driveway for 1-2 days and pour the driveway in one stage? **No. The contractor is to allow for access to properties at all times during construction activities.**
3. Who will be responsible for the existing Sprinkler System being destroyed during the construction of the sidewalk, Curb, and grading operation? There is NO pay item in the Contract if the City requires the Contractor to re-install a new one. **Existing sprinkler piping to be cut and capped within limits of the right of way. If damaged outside of the right of way/construction area, the contractor will repair it at the contractor's expense.**
4. Who will be responsible for Water meters, Water valves, and Water Vaults relocation, and any communication cable/utilities if any in conflict? There is no pay item in the Contract for those Items. **Contractor is to provide a WUCS per specification to coordinate any utility relocations necessary for the work. Four utility adjustment line items are included for adjustment of water meter, valve, vault and a pull box respectively. The engineer of record has performed utility coordination (first and second design drawing submissions) as part of the design phase.**

Addendum No. 1

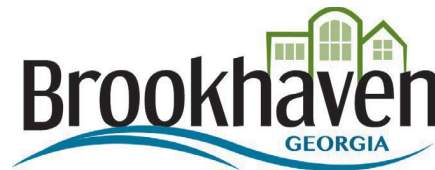

RFP No. 24-007

ITB 24-007 Chantilly Drive Sidewalk Project

5. Line Item# 702-0793: PISTACIA CHINENSIS- CHINESE PISTACHE TREE- 2 EA Qty, Can the City provide more details of this Tree such as Size, any specifications? **Trees will be 2" diameter.**
6. There is very limited space on this project to park Construction worker's vehicles, sub-contractors, construction equipment, etc. Can the City let contractors park vehicles and Equipment on the opposite (East) side of the road? **The contractor is to provide any areas for staging necessary to complete the project. Should lane closures be needed the contractor will provide flaggers and appropriate barrels/cones per the MUTCD for maintenance of traffic and apply for a right of way permit from the City. <https://www.brookhavenga.gov/publicworks/page/permits-and-applications-dumpsters-street-closure-and-utility-encroachment>**
7. When is the City's anticipated date of the beginning of the construction/NTP date of this project? **The City anticipates issuing a notice to proceed to the contractor in early July assuming receipt of responsible/responsive bids.**
8. Please provide a wall envelope to price it. **The engineer of record is to provide the wall envelope.**
9. Will the contractor haul off Existing stones and concrete blocks in the proposed sidewalk? **Contractors are required to coordinate with existing property owners regarding the relocation of landscape materials before demolition activities. Any existing stones and/or concrete blocks will be removed by the contractor at the contractor's expense. Include cost in grade and complete line item.**

Sincerely,

*Purina Alexander*

Purchasing Manager